



Ethospace® Tool Bar Installation and Disassembly for Recycling instructions

PROCEDURE:

1. POSITION END PANELS OF TOOL BAR OVER PANEL FRAMES OR WALL HANGER STRIPS AT DESIRED HEIGHT. ALIGN HOOKS ON END PANELS WITH SLOTS ON PANEL FRAME. SEE FIGURE 1.
2. ROTATE TOOL BAR BACK. INSERT TOP TAB ON EACH END PANEL INTO PANEL FRAME SLOTS OF EQUAL HEIGHT. ROTATE FRONT OF TOOL BAR DOWN TO ENGAGE ALL END PANEL HOOKS INTO SLOTS. SEE FIGURE 1.
3. LOCK TOOL BAR IN PLACE BY PUSHING DOWN ON EACH END PANEL UNTIL BOTH ENDS ARE FULLY SEATED. SEE FIGURE 1.

Tools Required:



Safety Glass

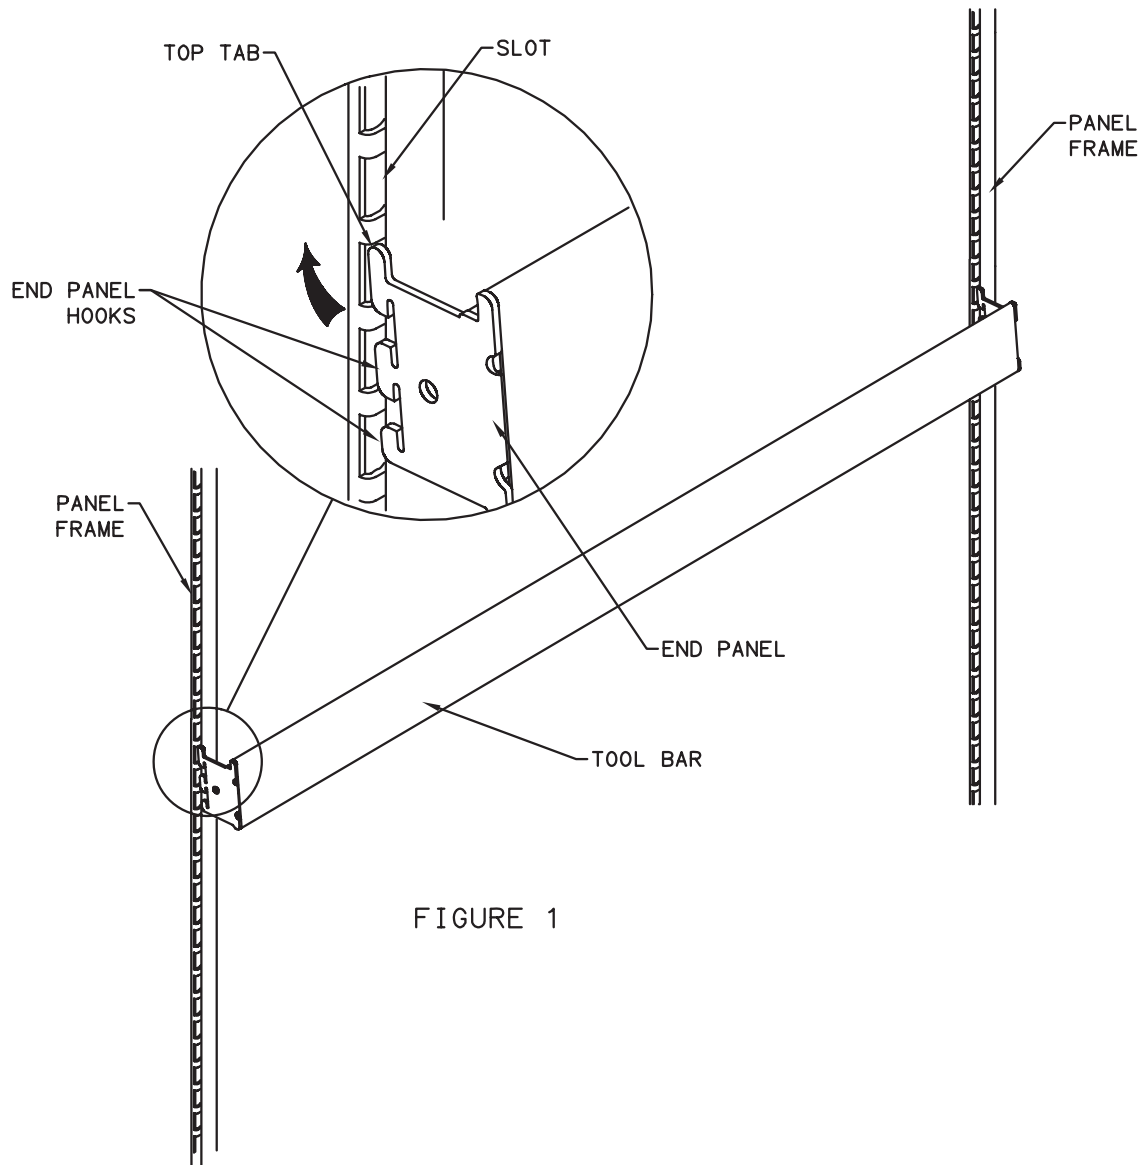


FIGURE 1

IMPORTANT: Save these instructions for layout changes.

HermanMiller

Part no. 182085 rev E.

© 2013 Herman Miller, Inc. Zeeland, Michigan. Printed in the U.S.A.
© Herman Miller and Ethospace are among the registered trademarks of Herman Miller, Inc.

Illustrations and specifications are based on the latest product information available at the time of publication.
The right is reserved to make changes in design and specifications at any time, without notice, and also to discontinue products.

Disassembly and Recycling:

Materials Identification and Segregation:

Where possible, plastic components are marked with ASTM recycling codes. Use these codes to identify material type for recycling. Non marked components should be treated as mixed plastic. Ferrous metals can be identified using a small magnet for recycling. Non-ferrous metals should be separated and recycled separately.

To disassemble product, reverse steps 3 through 1 and also do the following: