

HermanMiller

Daybed Installation Instructions



For more information about our products and services or to see a list of dealers, please visit us at www.hermanmiller.com/product-instructions or call 888 - 443 - 4357.
 © 2016 Herman Miller, Inc., Zeeland, Michigan Printed in U.S.A. Part No. 1BFR4C - B.

How to assemble your Daybed.

Safety Instructions & Warning


- Read all instructions before using products
- Failure to fully tighten screws may cause injury
- Periodically check fasteners to ensure tightness
- The right is reserved to make changes at any time without notice
- Will require at least 2 people
- Extra bolts have been included

Tools Required




Phillips Driver

Parts Included

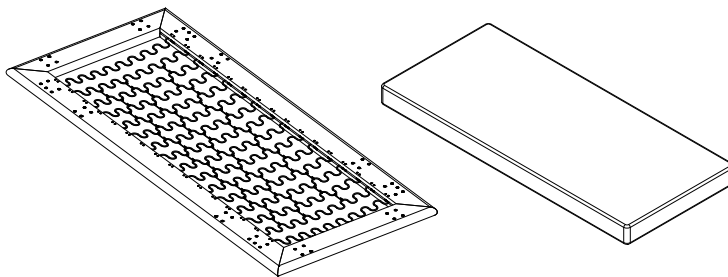


Daybed Frame (1)

Seat Cushion (1)



Optional: Wood Bolster (1)



Optional: Back Cushions (2)
or Side Cushion (1)



Optional: Bolster Support



Hairpin Leg (4)

OR




Wood Leg (4)



Short Bolt (24)



Tapping Screw (4)




4mm Allen Wrench (1)



Step 1

With seat cushion facing upside down, lower frame onto cushion. Ensure cushion is centered on frame then attach using three velcro straps. Straps should be secured in the positions shown below. Weave one end of the strap in/out of the spring to limit movement.

Ends

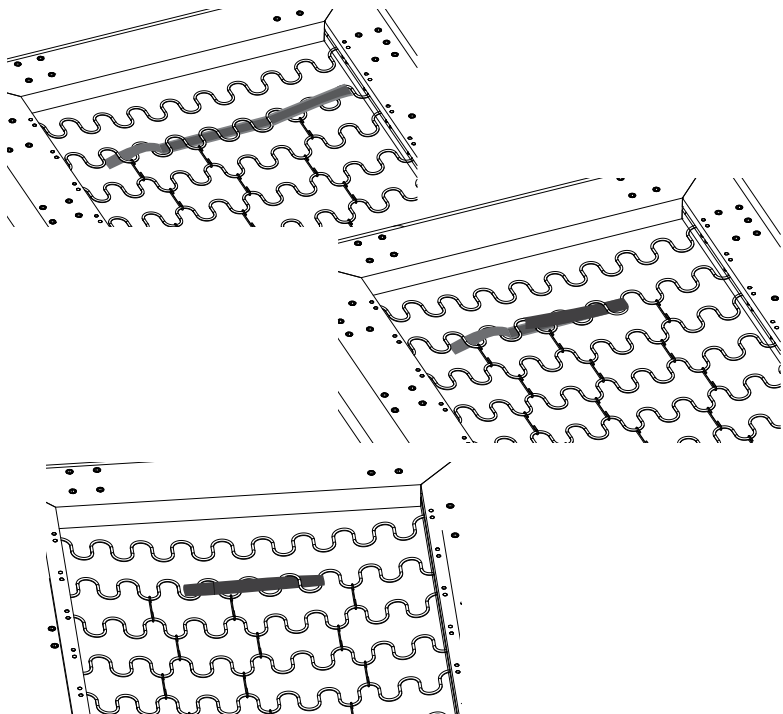


Middle

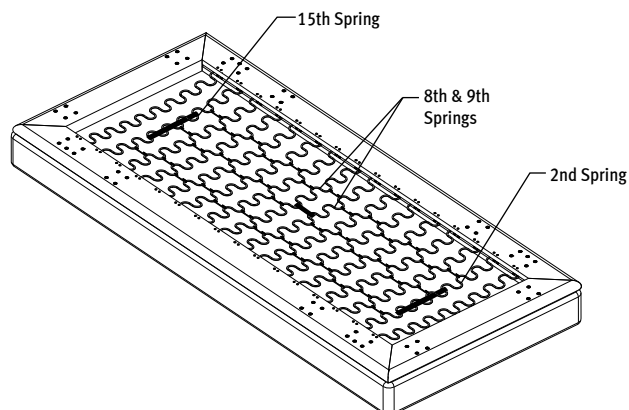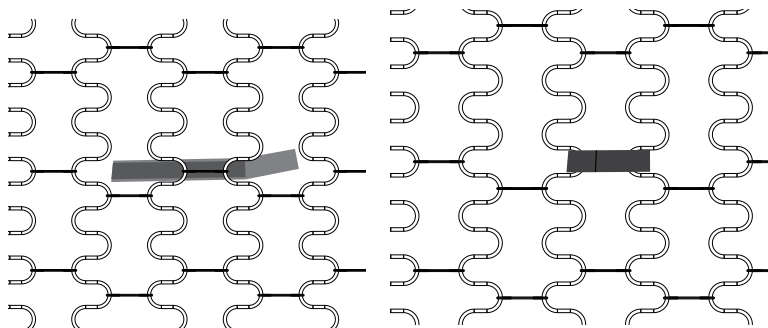


Step 2

Attach legs using 3 Short Bolts per leg for Hairpin Legs and 4 Short Bolts per leg for Wood Legs.

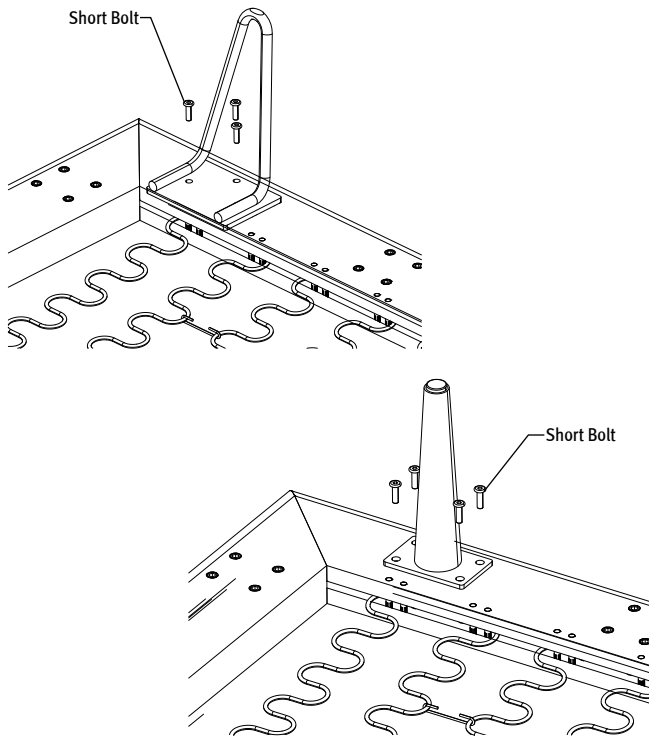


Step 3

Flip platform and cushion over so it is right side up.

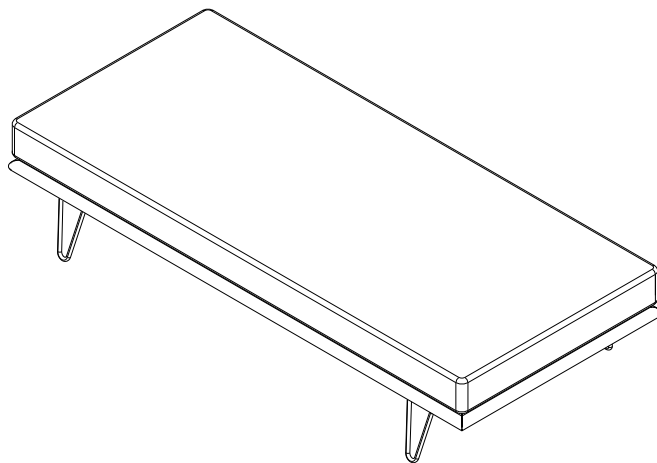


Step 4

Attach 2 Bolster supports with 4 Short Bolts either at back of daybed for back cushion option, or side of daybed for side cushion option.

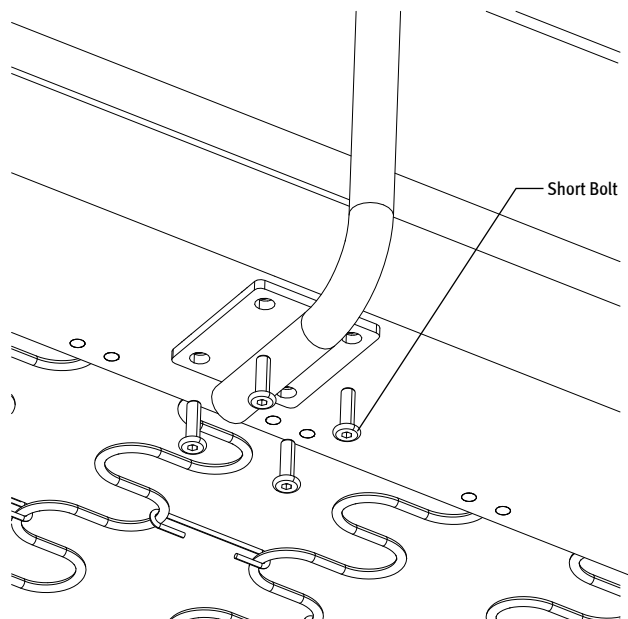

Step 5

Attach wood bolster with 2 tapping screws at each support.

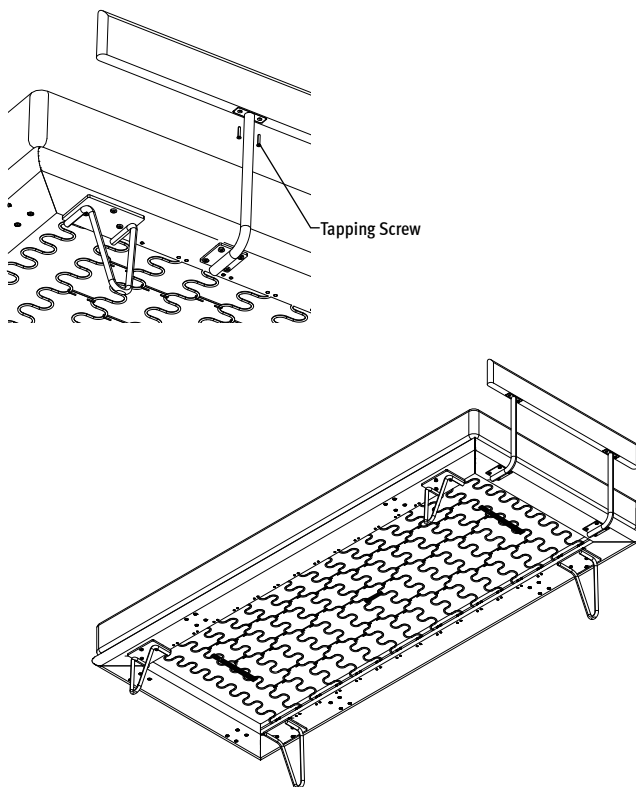

Step 6

Place back cushions or side cushion.

